

Comparison of Design Procedures for Pre Engineering Buildings (PEB): A Case Study



G. Sai Kiran

METEY Engineering Consultancy, Hyderabad

Abstract: In recent years, the introduction of Pre Engineered Building (PEB) concept in the design of structures has helped in optimizing design. The adoptability of PEB in the place of Conventional Steel Building (CSB) design concept resulted in many advantages, including economy and easier fabrication. In this study, an industrial structure (Ware House) is analyzed and designed according to the Indian standards, IS 800-1984, IS 800-2007 and also by referring MBMA-96 and AISC-89. In this study, a structure with length 187m, width 40m, with clear height 8m and having R-Slope 1:10, is considered to carry out analysis & design for 2D frames (End frame, frame without crane and frame with 3 module cranes). The economy of the structure is discussed in terms of its weight comparison, between Indian codes (IS800-1984, IS800-2007) & American code (MBMA-96), & between Indian codes (IS800-1984, IS800-2007).

Steel is the material of choice for design because it is inherently ductile and flexible. In structural engineering, a pre-engineered building (PEB) is designed by a manufacturer, to be fabricated using a pre-determined inventory of raw materials and manufacturing methods that can efficiently satisfy a wide range of structural and aesthetic design requirements. PEB can be fitted with different structural accessories including mezzanine floors, canopies, fasciae, interior

partitions, etc. The concept of PEB is the frame geometry which matches the shape of the internal stress (bending moment) diagram thus optimizing material usage and reducing the total weight of the structure. The complete designing is done at the factory and the building components are brought to the site in knock down condition. These components are then fixed/jointed at the site and raised with the help of cranes.

Structure Configuration

Selected structure is located in Rajasthan, India. Structure having the dimensions length 187m, width 40m, eave height 8m (clear), & roof slope 1:10. Structure suited in seismic zone IV with wind speed 47 m/sec considered life span of structure as 5 years. Complete structure configuration details can be found in Table I as follows [1]-[2], [10]-[11]:

Dead Load Calculation

Dead load calculation includes the weight calculation of sheeting, sag angles, purlins and insulation material as follows in Table II [2].

Sheeting unit weight	4.78 kg/m ² (5mm thick galvanized sheet)
Purlin wt.	4.71 kg/m (spacing of purlin = 1.8m) 4.71/1.8 2.61 kg/m ²
Sag rods wt.	1.2 kg/m 1.2/1.8 : 0.667 kg/m ²
Insulation material wt.	2 kg/m ²
Dead load	4.78 + 2.61 + 0.667 + 2 10 kg/m ² : 0.1 KN/m ²

Table II Calculation of Dead Load

Live Load Calculation

Calculation of live loads includes consideration of live loads according to different codes (Indian, American) as follows in Table III [2].

Wind Load Calculation

Wind load calculation is done according to Indian code IS: 875(part-2)-1987-Cl.5.3, as follows in Table IV [2].

Location	Rajasthan, India.
Length	187 m
Width	40 m
Eave height	8m (clear)
Seismic zone	IV
Wind speed	47 m/sec
Wind terrain category	2
Wind Class	C
Life Span	5 years
Slope of roof	1:10
Crane Capacity	10 t (for all 3- cranes)
Soil type	Medium
Importance factor	1
Response reduction factor	5
Purlin spacing	1800 mm
Girt spacing	2200 mm

Table I: Structure Configuration Details

As per IS: 875(part-2) -1987-Table-II (Imposed loads on various types of roofs).	
Angle of roof truss (α)	$\tan^{-1}(1/10) : 5.71^\circ [< 10^\circ]$
As per Indian- LL	0.75 KN/m ²
As per MBMA-96, Cl-1.3.2.	
As per AISC - LL	0.57 KN/m ²

Table III Calculation of Live Load

Wind speed (V _b)	47 m/sec
Risk coefficient (K ₁)	0.71
Probability factor (K ₂)	0.93
Topography factor (K ₃)	1.0
Design wind speed (V _Z)	$K_1 * K_2 * K_3 * V_b$ 0.71*0.93*1*47 31.03 m/sec
Design wind pressure (P _Z)	$0.6 * (V_Z)^2$ 0.6*31.032 578 N/m ² 0.578 KN/m ²

Table IV: Calculation of Wind Load

Pre-Engineered Buildings By Staad.pro

The power tool for computerized structural engineering STAAD Pro is the most popular structural engineering software product for 2D, 3D model generation, analysis and multi-material design. It has an intuitive, user-friendly, visualization tools, powerful analysis and design facilities and seamless integration to several other modeling and design software products. The software is fully compatible with all Windows operating systems. In STAAD Pro utilization ratio is the critical value that indicates the suitability of the member as per codes. Normally, a value higher than 1.0 indicates the extent to which the member is over-stressed, and a value below 1.0 tells us the reserve capacity available. Critical conditions used as criteria to determine Pass/Fail status are slenderness limits, Axial Compression and Bending, Axial Tension and Bending, Maximum w/t ratios and Shear. For static or dynamic analysis of Pre-engineered building, STAAD Pro has been the choice of design professionals around the world for their specific analysis needs [1]-[9].

Drawings

Following drawings includes drawings of frames which are selected for analysis [11], [12].

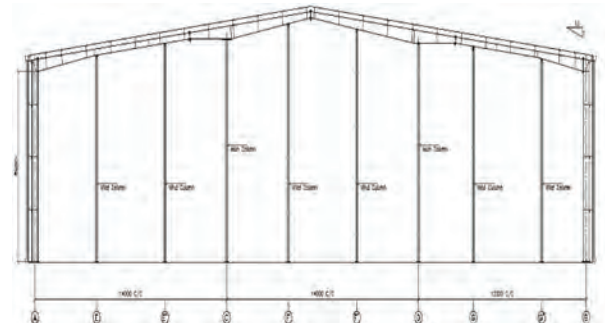


Fig. 1 End frame with wind columns

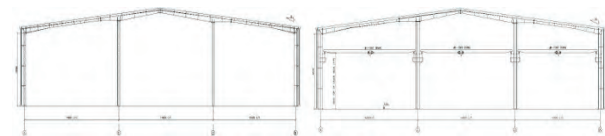


Fig. 2 Internal frame without crane Fig. 3 Internal main frame with cranes

Load Combinations

Load combinations include different combinations of loads according to different codes (AISC-89/MBMA-86, IS800-1984, IS800-2007) by considering serviceability and strength criteria as follows in Table V [4]-[7].

Design Specifications

Design specifications include limiting ratios of cross sections and deflection limits according to different codes (AISC-89/MBMA-86, IS800-1984, IS800-2007) as follows in Tables VI & VII [4]-[7].

Comparison Between Is 800-1984, Is 800-2007, Mbma

Comparison includes comparison of frame weights from STAAD.Pro and its variation of weight percentage according to different codes (AISC-89/MBMA-86, IS800-1984, IS800-2007) as follows in Table VIII [9]:

AISC-89/MBMA-86	IS 800-1984	IS 800-2007
Limit State of Serviceability: (DL+LL) (DL+WL/EL) (DL+CL) (DL+ 0.5*WL/EL+CL) Limit State of Strength: (DL+LL) (DL+ CL) 0.75*(DL+WL/EL) 0.75*(DL+WLRL-P) 0.75(DL+ 0.58*WL/EL+CL)	(DL+LL) (DL+WL/EL) (DL+LL+WL/EL) (DL+LL+CL) (DL+ LL + CL+ WL/EL) Limit State of Strength: (DL+LL) (DL+WL/EL) (DL+ LL+ CL) 0.75* (DL+LL+WL/EL) 0.75*(DL+ LL + CL+ WL/EL)	Limit State of Serviceability: (DL+LL) (DL+WL/EL) (DL+LL+CL) (DL+0.8*LL+0.8*WL/EL+0.8*CL) Limit State of Strength: 1.5*(DL+LL) 1.5*(DL+WL/EL) (0.9*DL+1.5 WL/EL) (1.5*DL+1.5*LL+1.05*CL) (1.5*DL+1.05*LL+1.5*CL) (1.2*DL+1.2*LL+0.6*WL/EL+1.05*CL) (1.2*DL+1.05*LL+0.6*WL/EL+1.2*CL) (1.2*DL+1.2*LL+1.2 *WL/EL+0.53*CL) (1.2*DL+1.2*LL+1.2*WL/EL+0.53*CL)

Table V: Load Combinations According to Different Codes

Compression			Ratio	Class of section		
				Class 1 (Plastic)	Class 2 (Com- pact)	Class 3 (Semi-Compact)
Outstanding element of compression flange	Rolled section		b/t_f	9.4ϵ	10.5ϵ	15.7ϵ
	Welded section		b/t_f	8.4ϵ	9.4ϵ	13.6ϵ
Internal element of compression flange	Compression due to bending		b/t_f	29.3ϵ	33.5ϵ	42ϵ
	Axial compression		b/t_f	Not applicable		
Web of an I,H or box section	Neutral axis at mid-depth		d/t_w	84ϵ	105ϵ	126ϵ
	Generally	If r_1 is negative	d/t_w	$(84\epsilon)/(1+r_1)$ but $\leq 42\epsilon$	$(105\epsilon)/(1+r_1)$	$(126\epsilon)/(1+2r_2)$ but $\leq 42\epsilon$
		If r_1 is positive	d/t_w		$(105\epsilon)/(1+1.5r_1)$ but $\leq 42\epsilon$	
	Axial compression		d/t_w	Not applicable		42ϵ
Web of a channel			d/t_w	42ϵ	42ϵ	42ϵ
Angle, compression due to bending (Both criteria should be satisfied)			b/t	9.4ϵ	10.5ϵ	15.7ϵ
			d/t	9.4ϵ	10.5ϵ	15.7ϵ
Single angle, or double angles with the components separated, axial compression (All three criteria should be satisfied)			b/t d/t $(b+d)/t$	Not applicable		15.7ϵ 15.7ϵ 25ϵ
Outstanding leg of an angle in contact back-to-back in a double angle member			d/t	9.4ϵ	10.5ϵ	15.7ϵ
outstanding leg of an angle with its back in continuous contact with another component			d/t	9.4ϵ	10.5ϵ	15.7ϵ
Stem of a T-section, rolled or cut from a rolled I-or H- section			D/t_f	8.4ϵ	9.4ϵ	18.9ϵ
Circular hollow tube, including welded tube subjected to:						
a) Moment			D/t	$42\epsilon^2$	$52\epsilon^2$	$146\epsilon^2$
b) Axial compression			D/t	Not applicable		$88\epsilon^2$

NOTES : 1. Elements which exceed semi-compact limits are to be taken as of slender cross-section.

2. $\lambda = (250/f_y)^{1/2}$.

3. The stress ratio r_1 and r_2 are defined as:

$r_1 = \{\text{Actual average axial stress (negative if tensile)} / \{\text{Design compressive stress of web alone}\}$

$r_2 = \{\text{Actual average axial stress (negative if tensile)} / \{\text{Design compressive stress of overall section}\}$

Limiting Deflections							
Description		AISC-89/MBMA-86		IS 800:1984		IS 800:2007	
		Vertical	Lateral	Vertical	Lateral	Vertical	Lateral
Main frame		L/180	H/60	L/325	H/325	L/180	H/150
Main frame with crane (pendent)			H/100	L/325	H/325	L/180	H/150
Main frame with crane (cab operated)			H/240	L/325	H/325	L/180	H/200
Crane beam	Electric<50t	L/600	L/400	L/750		L/750	H/400
	Electric>50t	L/800		L/1000		L/1000	
Wind column			H/120		H/325		
Mezzanine beam		L/240		L/325		L/240	H/150
Under slung crane		L/450		L/750		L/750	
Purlin		L/180		L/180		L/150	
Girt		L/120		L/180		L/150	
Minimum thickness	Primary	4 mm		6 mm		4 mm	
	Secondary	1.6 mm		2 mm		1.6 mm	

Table VII: Deflection Limits According to Different Codes

Description	MBMA/AISC (Kg's)	IS 800-2007 (Kg's)	IS 800-1984 (Kg's)	Comparison (% of increase in Wt.)		
				In IS 800-2007 compared to MBMA	In IS 800-1984 compared to MBMA (%)	In IS 800-1984 compared to IS 800-1984(%)
GL-1	2934	3334	3738	13.7	27.5	12.2
GL-2-3	1908	2411	2538	26.4	33.1	5.3
GL-4-25	2863	3599	3898	25.8	36.2	8.4
Total	7705	9344	10174	21	32	9

Table VIII: Frame Weights from Staad.Pro & Its Percentage Variation According to Different Codes

Results

Following graph shows the % increase in wt. in IS800-1984, 2007 compared to MBMA/AISC.

Following graph shows the % increase in wt. in IS800-1984 compared to IS 800-2007.

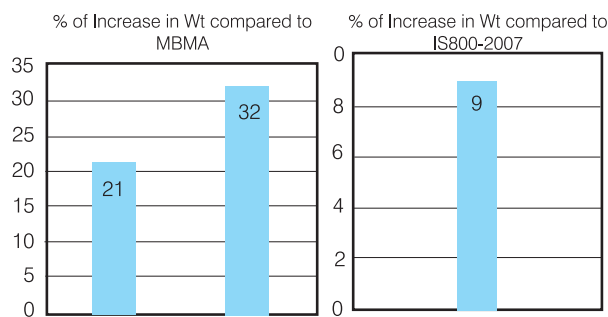


Fig. 4 Comparison between Indian codes (IS800-1984 & IS800-2007) & American code (MBMA)

Fig. 5 Comparison between Indian codes (IS800-1984 & IS800-2007)

Considerations

- 1) Wind Load application as per IS 875 (Part-3) -1987 (re-affirmed 1997), Design According to ASIC -1989, IS800-1984, & IS800-2007 for Built-up Members & Load combinations and Serviceability according to MBMA -1996, IS800-1984, & IS800-2007 [2], [4]-[7].
- 2) Internal Pressure Coefficient is considered as ± 0.2 . (Since % of opening $\leq 5\%$) [2].
- 3) External column base considered as fixed support. (Sway is not controlling with pinned connection). Internal column base considered as fixed support.
- 4) Wall cover is full height sheeted all around the building.

Conclusion

Following are the conclusions which are observed:

- 1) One of the main reason to increase in weight in IS 800-1984 compared to IS 800-2007 is "Serviceability Criteria". Deflection limits by IS code are higher than deflection limits by MBMA.
- 2) Reason for higher wt. in IS 800-2007 compared to AISC/MBMA is limiting ratios of the sections (Table 2 of IS800-2007).
- 3) Live load is 0.75 KN/m^2 in IS code & whereas it is 0.57 KN/m^2 in MBMA. Thus, concluded that loading as per Indian codes is greater than MBMA code.
- 4) The main difference between the Indian Code (IS800-

2007) to the other equivalent American Codes are in the classification of the cross-section of the steel member. As per Indian code, the classes of section considered for design are Plastic, Compact and Semi-compact, slender cross-section. It is well known that many PEB manufacturers use sections with very thin webs in order to reduce the weight of the section and be economical/competitive in their commercial offers, and these thin webs do not satisfy the codal provisions of IS 800: 2007.

- 5) It was observed in industries most of the projects done with AISC/MBMA. Reasons to preferring AISC/MBMA Code are IS 800:2007 has not considered slender sections which are often encountered in cold formed thin sections, because there is another code IS 801 for this. Hence people using cold formed sections cannot use IS 800. May be that is the reason people are using AISC code & the main reason to use the AISC code for PEB structures is due the fact that it leads to an economical structural solution as compared to the Indian Code.
- 6) It is observed that crane Impact load allowance is similar in case of vertical loads whereas in case of horizontal loads (surge, barking loads) the impact allowance is more in MBMA compared to IS codes.

References

- [1] Indian Standard: 1893 (Part1); 2002. Criteria for Earthquake Resistant Design Structures: New Delhi: BIS; 2002.
- [2] IS 875: Part 1 to 5 Code Of Practice For Design Loads (Other Than Earthquake) For Buildings and Structures, 1st Revision, New Delhi: BIS..
- [3] Indian Standard: 801 - 1975; Code Of Practice For Use Of Cold-Formed Light Gauge Steel Structural Member's In General Building Construction, 1st Revision, New Delhi: BIS.
- [4] Indian Standard: 800 - 2007; General Construction in Steel - Code of Practice; 3rd S Revision, New Delhi: BIS.
- [5] Indian Standard: 800 - 1984; Code of Practice for General Construction, In Steel; 1st Revision, New Delhi: BIS.
- [6] MBMA: Metal Building Manufacturers Association-2006, Metal Building Systems Manual, <http://www.mbma.com>.
- [7] AISC: American Institute of Steel Construction-1989, Manual of Steel Construction, Allowable Stress Design.
- [8] Syed Firoz (2012), "Design Concept of Pre-engineered Building", International Journal of Engineering Research and Applications (IJERA), Vol. 2, Issue 2, 267-272.
- [9] C. M. Meera (2013), "Pre-Engineered Building Design of an Industrial Warehouse", international journal of engineering sciences & emerging technologies, volume 5, issue 2, pp: 75-82.
- [10] Indian Standard: 807 - 1976; Code Of Practice For Design, Manufacture, Erection And Testing (Structural Portion) Of Cranes and Hoists, 1st Revision, New Delhi: BIS.
- [11] Technical Manual, Zamil Steel, Saudi Arabia, Pre-Engineered Buildings Division.
- [12] Technical Hand Book, Kirby Building Systems-INDIA.LTD. ♦